



Step 1




Lay the decal out flat so that the transparent application film is facing upwards. Using a hard plastic object such as a credit card or squeegee slowly rub over the area of the decal. (This is necessary to remove any air bubbles from between the decal and the application film and to ensure that the decal has adhered to the application film.)

Step 2




Position the decal on the wall and 'tack' it in place temporarily using masking tape. Make sure you are happy with the position and layout of the decal.

Step 3




Once you are happy with the position of the decal. Place a long strip of masking tape right down the middle of the decal. Make sure the masking tape sticks well to the wall. Now you can remove the temporary tape holding the decal up. (For large, tall decals it may be easier to place the masking tape across the middle)

Step 4




Carefully fold the decal back to the masking tape line.

Step 5




Starting from the top corner, slowly peel the backing paper away from the vinyl decal and application film. Make sure the vinyl decal stays adhered to the transparent application film. If it sticks to the backing paper instead, simply replace the backing paper and give the whole decal another rub (as we did in the preparation stage) Try not to touch the adhesive on the back of decal.

Step 6




Holding the application film and decal away from the wall, carefully cut off the backing paper and discard.

Step 7




Hold the outer edge of the application film slightly away from the wall. With your other hand, begin pressing the decal onto the wall using your squeegee or credit card. It is important to start in the centre near the masking tape line. Begin with an upward vertical stroke applying a medium pressure to the decal.

Step 8




Starting at the centre again, squeegee the vinyl down towards the bottom. Keep holding the decal out from the wall with your other hand.

Step 9




Continue to squeegee the decal up and down, gradually working your way across the decal to the edge. Make sure you don't trap any air bubbles under the decal.

Step 10




Once you have applied the first half of the decal to the wall, you can carefully remove the masking tape hinge.

Step 11




Carefully fold back the other side of the decal.

Step 12




Slowly remove the backing paper from this half of the decal. Make sure the vinyl does not stick to the wall yet.

Step 13




Begin to squeegee the decal moving upwards from the centre while holding the application film tight with the other hand.

Step 14




Next squeegee from the centre of the decal again, this time moving downward. Continue moving up and down starting from the centre each time. Slowly work your way out to the edge of the decal.

Step 15




Give the entire area of the decal one final rub with the squeegee to make sure it is well stuck to the wall and that there are no air bubbles.

Step 16



Starting from the top corner, slowly begin to peel off the clear application film. It is important to peel the film off folding it back against itself-keeping it as flat as possible against the wall. If the vinyl decal comes off the wall with the application film, simply replace the film, rub the vinyl again with the squeegee and try to remove the film again. It may also be helpful to leave the film on for about 30 mins. before removing.

Congratulations!




Your vinyl decal is now finished.

Self-adhesive decals are ideal for...

- large feature walls
- contemporary interiors
- children's bedrooms
- nursery decoration
- frosted glass windows
- motivational wall quotes
- custom designed wall art
- commercial spaces

WallsThatTalk® designs and produces an extensive range of contemporary, **self-adhesive, removable** vinyl wall and window decals. Our decals are made from the **highest quality** vinyl and are made to order in Australia, ensuring fantastic results every time.

WallsThatTalk® decals are great for the home, office, retail stores and commercial spaces. With so many designs and over **30 colours** to choose from (plus our custom design service) the possibilities are only limited by your imagination! Check out some of our other great designs.

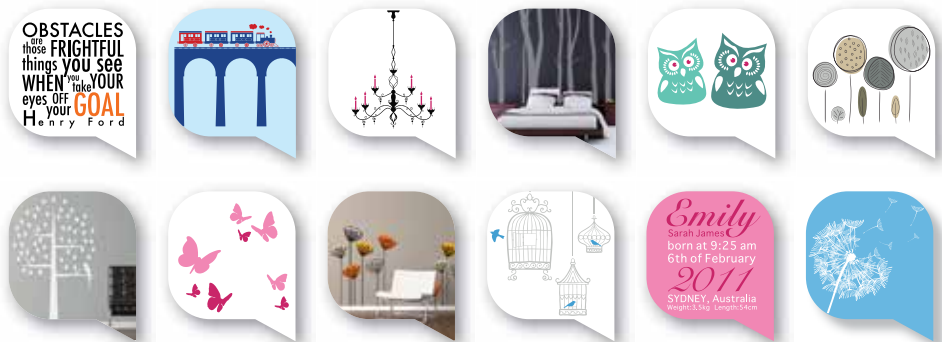

Visit our online shop at www.decalstore.com.au
to order your decals today!

Congratulations for purchasing a quality WallsThatTalk® decal!

We have prepared your decal so that you can install it yourself. To ensure that your decal looks as good in your home as it possibly can, we recommend that you read and follow the application instructions carefully. If you are unsure about any aspect of these instructions, please contact us for clarification before you begin or check out the installation videos at www.wallsthattalk.com.au for further information.

Application Instructions


Preparation

The surface you wish to attach your WallsThatTalk® decal to must first be clean and free from dust, grease or any other contamination. Freshly painted or lacquered surfaces must be allowed to completely cure before the decal is applied. We recommend waiting a minimum of 2-3 weeks. Glass surfaces should be thoroughly cleaned with a suitable glass cleaning product.

Extremes of temperature can make the application of vinyl decals more difficult. The air temperature should be moderate during the application process.

Your decal has been prepared for ease of application and consists of 3 layers:

- The application film (a transparent or paper film used to transfer the decal to your surface)
- The self adhesive vinyl (the decal itself)
- The backing paper (this is either white or blue and has a grid pattern printed on the back)



Some decals are supplied 'ready to apply' whereas other decals (usually the larger ones) may be supplied in 'kit form'. In this case, elements of the design may need to be separated. Simply cut them out using scissors, a scalpel or craft knife.

Next you will need to work out the composition of your decal on your wall. You might want to temporarily tape the parts of your decal in place on the wall (using masking tape) to make sure you are happy with the placement and composition of the design in your space.

If you are applying your decal to glass, you may find it easier to give the surface a light misting of water with a few drops of dish washing liquid added. This will allow you to remove or adjust the decal should you accidentally place it incorrectly. If using this 'wet application' method, you will need to squeegee the decal well and let it dry out completely (this may take up to 12 hours) before you can remove the application film. This method may take a little more time, but the results will be worth it.

Now you are ready to begin the application process. Take your time, the best results are achieved with patience. Work slowly and carefully, following the step-by-step instructions.

We hope that you enjoy your WallsThatTalk® decal now and well into the future.